






UtileIII

Unilumin | RENTAL

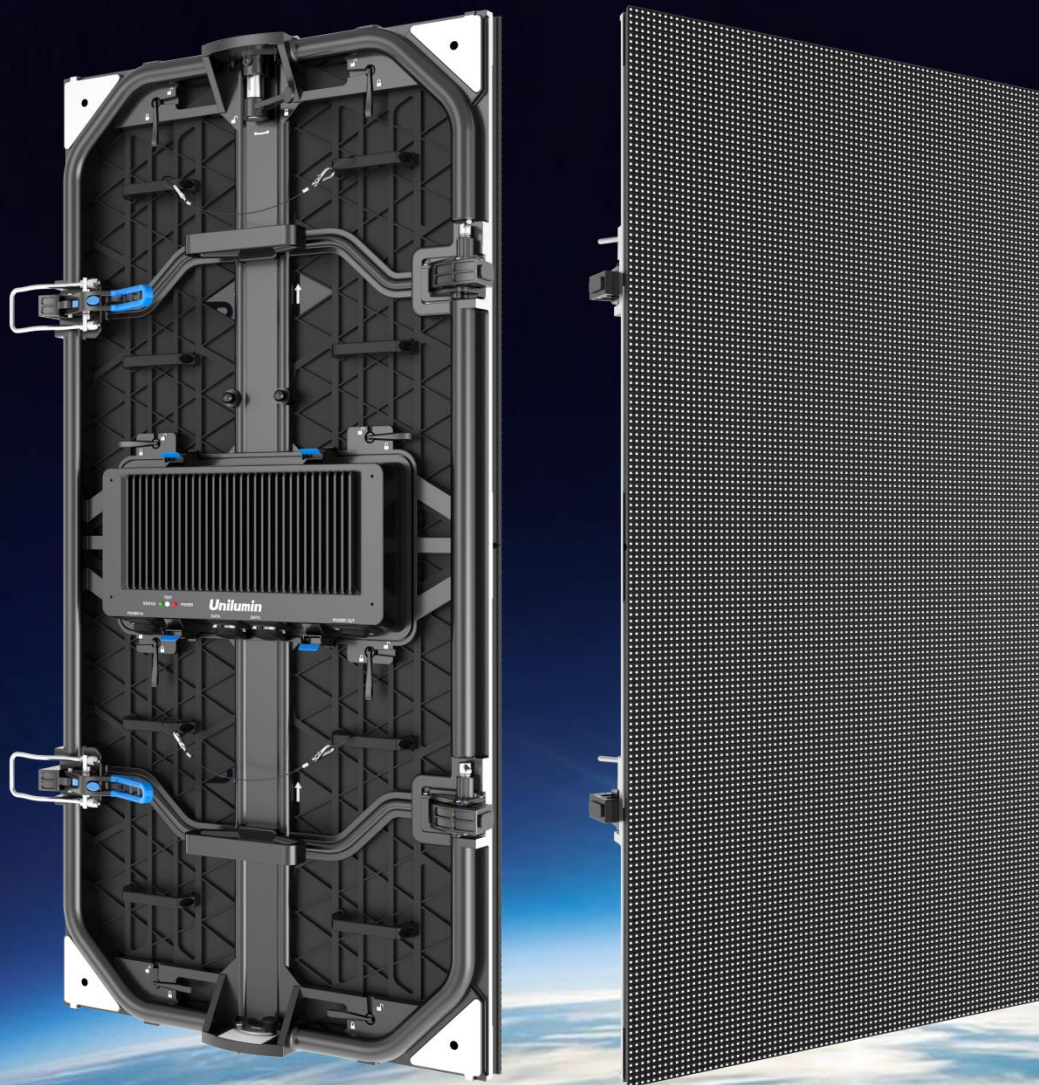

**Dual Modes,
Double Revenue**

Utile III Features

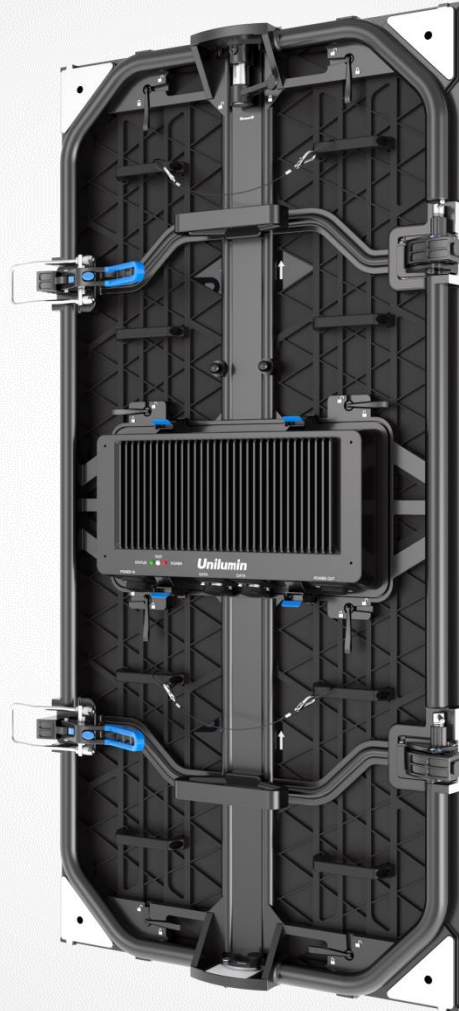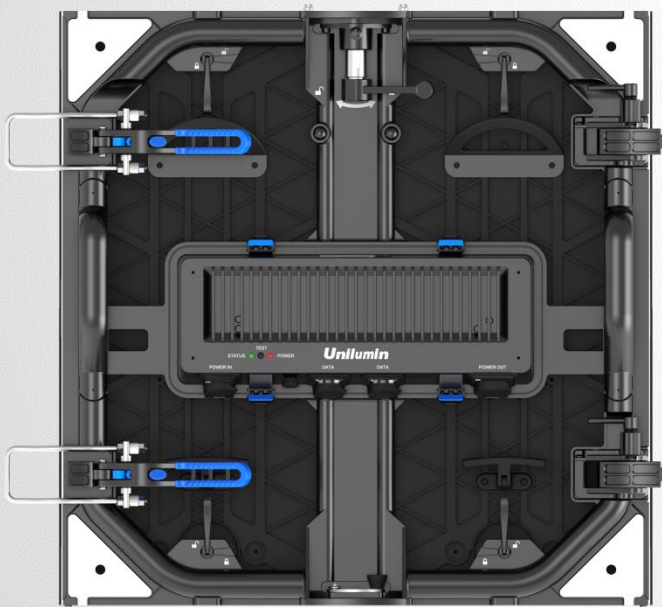

- DDC Technology
- Tool-free maintenance
- One-person installation
- Flexible concave & convex curve

Outdoor & indoor dual use, easily switched in one second

D Mode

Normal method of decreasing screen brightness to 10% (for reference only)

N Mode



DDC Technology (Dual Drive Configuration)


Revolutionary DDC technology to realize indoor & outdoor dual use, Day Mode and Night Mode can be switched in 1s

A real dual-use product to supplement the market gap


Note: DDC technology only applies to 3.9mm specific configuration.

Outdoor protection & easy maintenance


Efficiency: more space left for removing modules, efficiently avoiding collisions and saving time

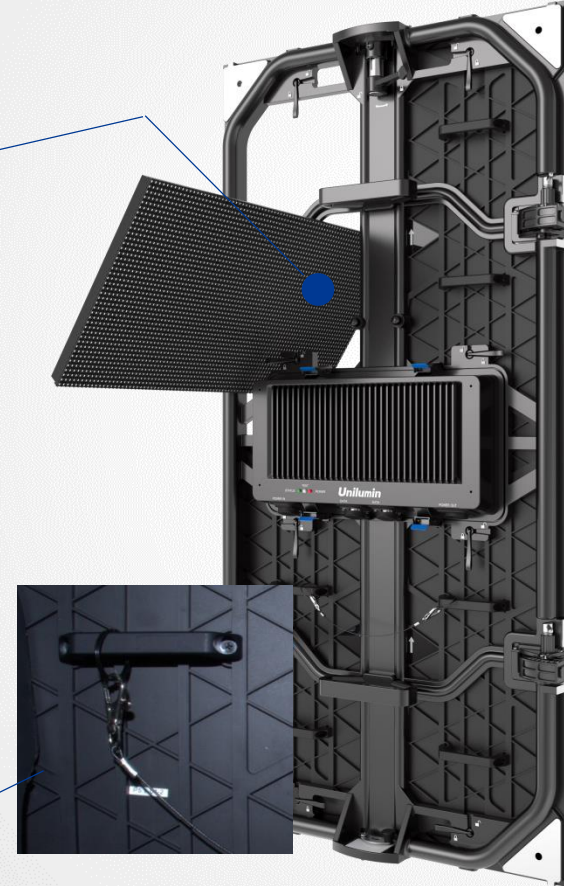


Safety: safety rope design in module and power box

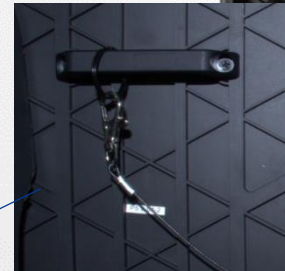

Convenience: convenient tool-free rear maintenance of modules and power box

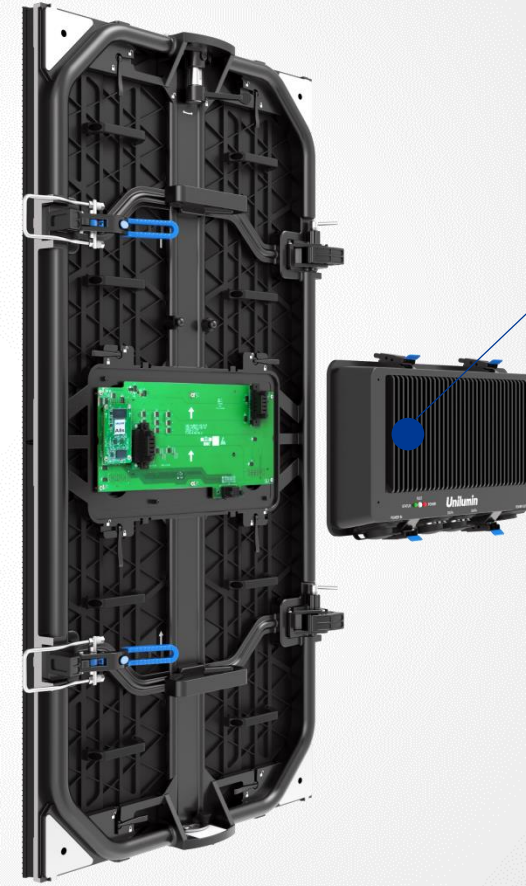


Flexible concave & convex curve, capable of creative installation

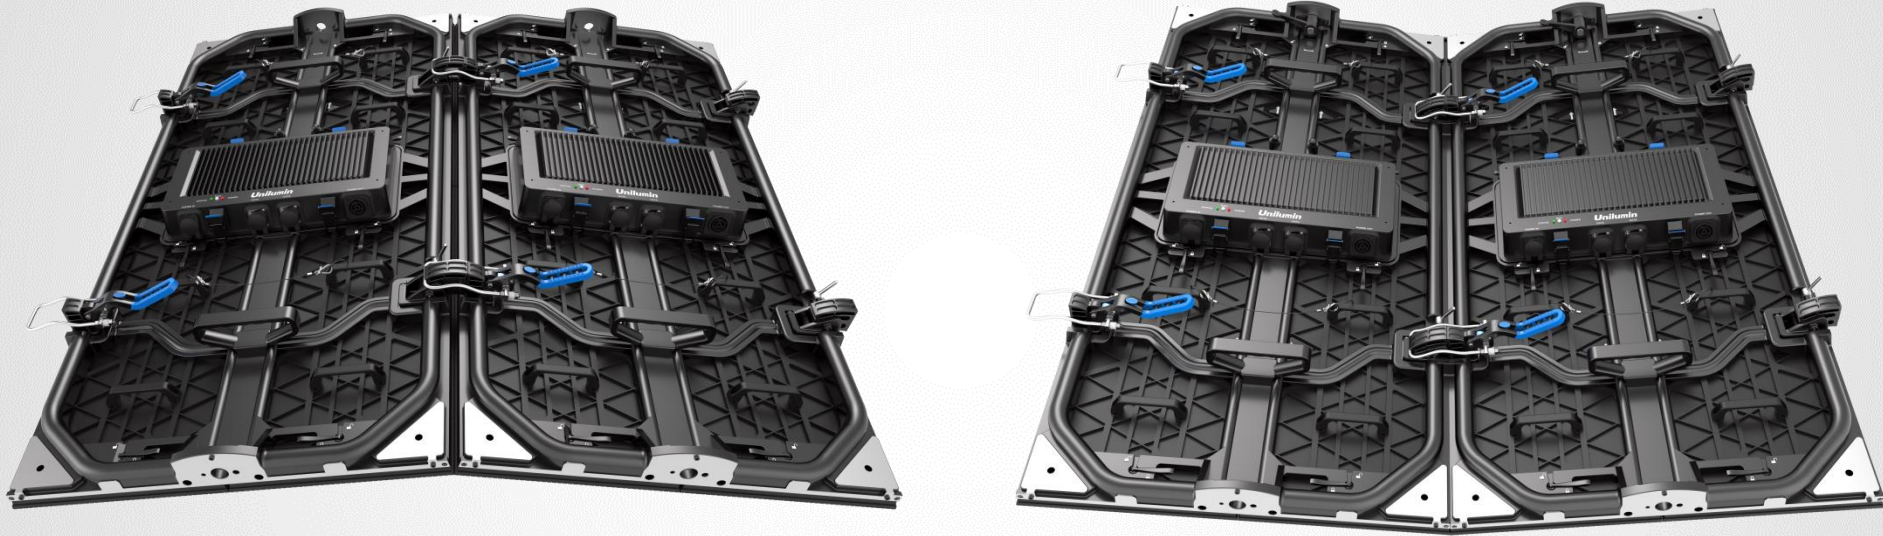

$\pm 15^\circ$ concave & convex curve, satisfying the curve requirement of creative design

Compatible accessories (hanging, stacking structures) with UpadIII2.6

One-person installation to save labor cost

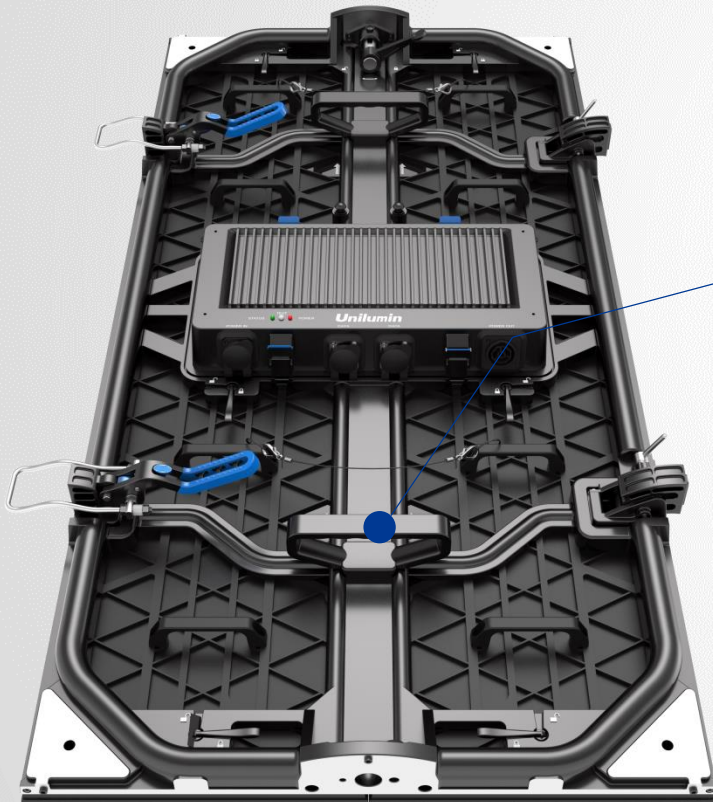

Lift handle in the middle of cabinet designed for easy handling



Lightweight of only 13kg per panel
One person can easily handle and install

What can UtileIII bring to our customers?

Less investment costs

DDC technology can be applied both outdoor & indoor, meaning less investment costs and larger market

More convenient installation

500x1000 500x500
Two cabinet sizes optional

More efficient maintenance

Modular construction without screw, achieving a fast maintenance

More flexible installation

Flexible ± 15 curve installation satisfies any creative design

Specification

Type	UtileIII03	UtileIII04	UtileIII05
Pixel Pitch	3.9mm	4.8mm	5.9mm
LED Type	Black SMD	SMD	SMD
Brightness	3500-4000nits	4500nits	4500nits
Contrast ratio	5000:1	4000:1	5000:1
Pixels Per Panel	128*256dots	104*208dots	84*168dots
Pixel Density	65,536	43,264	28,224
Panel Weight	13kg/panel	13kg/panel	13kg/panel
Module Size	W250mm×H500mm	W250mm×H500mm	W250mm×H500mm
Cabinet Size	W500mm×H1000mm	W500mm×H1000mm	W500mm×H1000mm
Aspect Ratio	1:2	1:2	1:2
Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Environment	Outdoor	Outdoor	Outdoor
Curve function	-5°~+15°	±15°	±15°



TOGETHER, FOR A BRIGHTER FUTURE

Unilumin Group Co., Ltd.

Headquarters: 112 Yongfu Rd., Qiaotou Village, Fuyong Town, Baoan District, Shenzhen 518103 China.

Daya Bay Factory : Longsheng Fifth Road, western Daya Bay, Huiyang District, Huizhou, China.

Pingshan Factory : 6 Lanjing North Road, Pingshan District, Shenzhen 518118 China.

Tel: +86-755-29918999

Fax: +86-755-29912092

Sales E-mail: sales@unilumin.com

Official website: <http://www.unilumin.com>

